



Transmission



ALLISON


SPEEDS	TORQUE	OVERALL RATIO	FORWARD RATIOS										WEIGHT (LB)	LUBE (PT)		
			1	2	3	4	5	6	7	8	9	10				
4000 RDS: ON/OFF HIGHWAY																
4, 5 or 6	1770	5.48	3.51	1.91	1.43	1.00	0.74	0.64							831	51
4000 RDS: SPECIALTY PTO, HET																
4, 5 or 6	1850	5.48	3.51	1.91	1.43	1.00	0.74	0.64							893	51
4500 RDS: ON/OFF HIGHWAY																
4, 5 or 6	1650	7.01	4.7	2.21	1.53	1.00	0.76	0.67							831	51
4500 RDS: SPECIALTY PTO, HET																
4, 5 or 6	1650	7.01	4.7	2.21	1.53	1.00	0.76	0.67							893	51
4700 RDS: ON/OFF HIGHWAY																
7	1770	11.92	7.63	3.51	1.91	1.43	1.00	0.74	0.64						1087	54
4700 RDS: SPECIALTY PTO, HET																
7	1850	11.92	7.63	3.51	1.91	1.43	1.00	0.74	0.64						1149	54
4000 HS																
4, 5 or 6	1770	5.48	3.51	1.91	1.43	1.00	0.74	0.64							831	48
4500 HS																
4, 5 or 6	1650	7.01	4.7	2.21	1.53	1.00	0.76	0.67							831	48

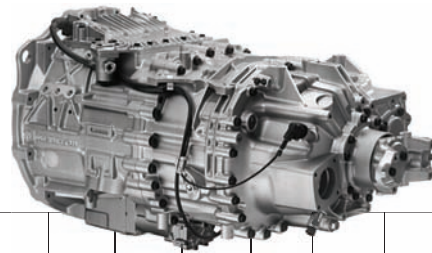

ARVINMERITOR

	SPEEDS	TORQUE	OVERALL RATIO	1	2	3	4	5	6	7	8	9	10	11	12	WEIGHT (LB)	LUBE (PT)
ZF FREEDOMLINE AUTOMATED																	
M-13Z12A-A13	12	1350	15.86	15.86	12.33	9.57	7.44	5.87	4.57	3.47	2.70	2.10	1.63	1.29	1.00	565	23.25
M-14Z12A-A14	12	1450	15.86	15.86	12.33	9.57	7.44	5.87	4.57	3.47	2.70	2.10	1.63	1.29	1.00	565	23.25
MO-13Z12A-A13	12	1350	15.81	12.33	9.59	7.44	5.78	4.57	3.55	2.70	2.10	1.63	1.27	1.00	0.78	565	23.25
MO-14Z12A-A14	12	1450	15.81	12.33	9.59	7.44	5.78	4.57	3.55	2.70	2.10	1.63	1.27	1.00	0.78	565	23.25
MO-13Z16A-A13	12	1350	15.81	12.33	9.59	7.44	5.78	4.57	3.55	2.70	2.10	1.63	1.27	1.00	0.78	565	23.25
MO-14Z16A-A14	12	1450	15.81	12.33	9.59	7.44	5.78	4.57	3.55	2.70	2.10	1.63	1.27	1.00	0.78	565	23.25
MO-15Z12A-A15	12	1550	15.81	12.33	9.59	7.44	5.78	4.57	3.55	2.70	2.10	1.63	1.27	1.00	0.78	565	23.25
MO-16Z12A-A16	12	1650	15.81	12.33	9.59	7.44	5.78	4.57	3.55	2.70	2.10	1.63	1.27	1.00	0.78	565	23.25


CATERPILLAR



CX31*	SPEEDS	TORQUE	MAXIMUM HORSEPOWER	OVERALL RATIO	FORWARD RATIOS								WEIGHT (LB)
					1	2	3	4	5	6	7	8	
On/off Highway use	6 forward, 1 reverse	1770	550 hp @ 2100 rpm	7.21	4.40	2.33	1.53	1.00	0.72	0.61			906; with retarder, 1088
Refuse use	6 forward, 1 reverse	1650	500 hp @ 2100 rpm	7.21	4.40	2.33	1.53	1.00	0.72	0.61			906; with retarder, 1088
HET use	6 forward, 1 reverse	1850	600 hp @ 2100 rpm	7.21	4.40	2.33	1.53	1.00	0.72	0.61			1326, with retarder, 1476
CX35*	SPEEDS	TORQUE	MAXIMUM HORSEPOWER	OVERALL RATIO	FORWARD RATIOS								WEIGHT (LB)
Automatic Transmission					8 forward, 1 reverse	2150	625 hp @ 2100 rpm	9.10	5.73	3.57	2.72	1.95	

*Specs subject to change.

EATON FULLER




MANUAL TRANSMISSIONS	SPEEDS	TORQUE	OVERALL RATIO	FORWARD RATIOS										WEIGHT (LB)	LUBE (PT)	
				L	1	2	3	4	5	6	7	8	9			10
FR-9210B	10	950	14.8		14.8	10.95	8.09	5.97	4.46	3.32	2.45	1.81	1.35	1.00	592	24
FR-11210B	10	1150	14.8		14.8	10.95	8.09	5.97	4.46	3.32	2.45	1.81	1.35	1.00	592	24
FR-12210B	10	1250	14.8		14.8	10.95	8.09	5.97	4.46	3.32	2.45	1.81	1.35	1.00	592	24
FR-13210B	10	1350	14.8		14.8	10.95	8.09	5.97	4.46	3.32	2.45	1.81	1.35	1.00	592	24
FR-14210B	10	1450	14.8		14.8	10.95	8.09	5.97	4.46	3.32	2.45	1.81	1.35	1.00	592	24
FR-15210B	10	1550	14.8		14.8	10.95	8.09	5.97	4.46	3.32	2.45	1.81	1.35	1.00	592	24
FRO-11210B	10	1150	14.8		11.06	8.19	6.05	4.46	3.34	2.48	1.83	1.36	1.00	0.75	592	24
FRO-12210B	10	1250	14.8		11.06	8.19	6.05	4.46	3.34	2.48	1.83	1.36	1.00	0.75	592	24
FRO-13210B	10	1350	14.8		11.06	8.19	6.05	4.46	3.34	2.48	1.83	1.36	1.00	0.75	592	24
FRO-14210B	10	1450	14.8		11.06	8.19	6.05	4.46	3.34	2.48	1.83	1.36	1.00	0.75	592	24
FRO-15210B	10	1550	14.8		11.06	8.19	6.05	4.46	3.34	2.48	1.83	1.36	1.00	0.75	592	24
FRO-16210B	10	1650	14.8		11.06	8.19	6.05	4.46	3.34	2.48	1.83	1.36	1.00	0.75	592	24
FRO-11210C	10	1150	17.17		12.69	9.29	6.75	4.90	3.62	2.59	1.90	1.38	1.00	0.74	592	24
FRO-12210C	10	1250	17.17		12.69	9.29	6.75	4.90	3.62	2.59	1.90	1.38	1.00	0.74	592	24
FRO-13210C	10	1350	17.17		12.69	9.29	6.75	4.90	3.62	2.59	1.90	1.38	1.00	0.74	592	24
FRO-14210C	10	1450	17.17		12.69	9.29	6.75	4.90	3.62	2.59	1.90	1.38	1.00	0.74	592	24
FRO-15210C	10	1550	17.17		12.69	9.29	6.75	4.90	3.62	2.59	1.90	1.38	1.00	0.74	592	24
FRO-16210C	10	1650	17.17		12.69	9.29	6.75	4.90	3.62	2.59	1.90	1.38	1.00	0.74	592	24
FRO-17210C	10	1750	17.51		12.69	9.29	6.75	4.90	3.62	2.59	1.90	1.38	1.00	0.74	592	24
FRO-18210C	10	1850	17.51		12.69	9.29	6.75	4.90	3.62	2.59	1.90	1.38	1.00	0.74	592	24
RTLO-12913A	13	1250	16.86	12.31	8.64	6.11	4.43	3.23	1.95	1.38	1.00	0.73			714	28
									2.29	1.62	1.17	0.86				
RTLO-14913A	13	1450	16.86	12.31	8.64	6.11	4.43	3.23	1.95	1.38	1.00	0.73			714	28
									2.29	1.62	1.17	0.86				

EATON FULLER CONTINUED

	SPEEDS	TORQUE	OVERALL RATIO	FORWARD RATIOS										WEIGHT (LB)	LUBE (PT)	
				L	1	2	3	4	5	6	7	8	9			10
MANUAL TRANSMISSIONS																
RTLO-16913A	13	1650	16.86	12.31	8.64	6.11	4.43	3.23	1.95	1.38	1.00	0.73			714	28
									2.29	1.62	1.17	0.86				
RTLO-18913A	13	1850	16.86	12.31	8.64	6.11	4.43	3.23	1.95	1.38	1.00	0.73			716	28
									2.29	1.62	1.17	0.86				
RTLO-20913A	13	2050	16.86	12.31	8.64	6.11	4.43	3.23	1.95	1.38	1.00	0.73			716	28
									2.29	1.62	1.17	0.86				
RTO-14915	15	1450	16.94		9.96	7.63	5.90	4.54	3.57	2.79	2.14	1.65	1.27	1.00	696	28
					16.94	12.98	10.03	7.73	6.07							
RTO-16915	15	1650	16.94		7.83	6.00	4.63	3.57	2.81	2.19	1.68	1.30	1.00	0.79	696	28
					13.31	10.20	7.88	6.07	4.77							
RTLO-14918B	18	1450	19.72	12.29	7.30	5.16	3.74	2.73	1.95	1.38	1.00	0.73			716	28
				14.40	8.56	6.05	4.38	3.20	2.29	1.62	1.17	0.86				
RTLO-16918B	18	1650	19.72	12.29	7.30	5.16	3.74	2.73	1.95	1.38	1.00	0.73			716	28
				14.40	8.56	6.05	4.38	3.20	2.29	1.62	1.17	0.86				
RTLO-18918B	18	1850	19.72	12.29	7.30	5.16	3.74	2.73	1.95	1.38	1.00	0.73			716	28
				14.40	8.56	6.05	4.38	3.20	2.29	1.62	1.17	0.86				
RTLO-20918B	18	2050	19.72	12.29	7.30	5.16	3.74	2.73	1.95	1.38	1.00	0.73			716	28
				14.40	8.56	6.05	4.38	3.20	2.29	1.62	1.17	0.86				
RTLO-22918B	18	2250	19.72	12.29	7.30	5.16	3.74	2.73	1.95	1.38	1.00	0.73			716	28
				14.40	8.56	6.05	4.38	3.20	2.29	1.62	1.17	0.86				
ULTRASHIFT AND AUTOSHIFT TRANSMISSIONS																
RTO-10910B-DM3	10	1050	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	671	26
RTO-12910B-DM3	10	1250	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	671	26
RTO-14910B-DM3	10	1450	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	681	26
RTO-16910B-DM3	10	1650	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	681	26
RTO-10910B-AS3	10	1050	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	646	26
RTO-12910B-AS3	10	1250	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	646	26
RTO-14910B-AS3	10	1450	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	656	26
RTO-16910B-AS3	10	1650	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	656	26
RTO-18910B-AS3	10	1850	14.81		10.96	8.18	6.07	4.46	3.32	2.46	1.83	1.36	1.00	0.74	656	26
RTO-14910C-AS3	10	1450	17.53		12.80	9.25	6.76	4.90	3.58	2.61	1.89	1.38	1.00	0.73	656	26
RTO-16910C-AS3	10	1650	17.53		12.80	9.25	6.76	4.90	3.58	2.61	1.89	1.38	1.00	0.73	656	26
RTLO-14918A-AS3	18	1450	16.7	10.40	7.26	5.16	3.74	2.73	1.94	1.38	1.00	0.73			738	28
					8.51	6.05	4.38	3.20	2.28	1.62	1.17	0.86				
RTLO-16918A-AS3	18	1650	16.7	10.40	7.26	5.16	3.74	2.73	1.94	1.38	1.00	0.73			738	28
					8.51	6.05	4.38	3.20	2.28	1.62	1.17	0.86				
RTLO-18918A-AS3	18	1850	16.7	10.40	7.26	5.16	3.74	2.73	1.94	1.38	1.00	0.73			738	28
					8.51	6.05	4.38	3.20	2.28	1.62	1.17	0.86				
RTLO-20918A-AS3	18	2050	16.7	10.40	7.26	5.16	3.74	2.73	1.94	1.38	1.00	0.73			738	28
					8.51	6.05	4.38	3.20	2.28	1.62	1.17	0.86				
RTLO-22918A-AS3	18	2250	16.7	10.40	7.26	5.16	3.74	2.73	1.94	1.38	1.00	0.73			738	28
					8.51	6.05	4.38	3.20	2.28	1.62	1.17	0.86				

TRANSMISSION TECHNOLOGY CORP.

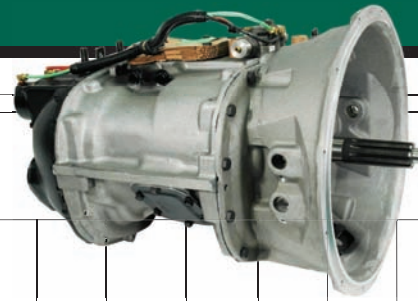

	SPEEDS	TORQUE	OVERALL RATIO	REVERSE RATIOS 1	FORWARD RATIOS										WEIGHT (LB)	LUBE (PT)
					1	2	3	4	5	6	7	8	9	10		
PS100-10D	10	1000	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	626	18
PS125-10D	10	1250	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	636	18
PS135-10D	10	1350	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	636	18
PS145-10D	10	1450	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	636	18
PSO100-10S	10	1000	16.74	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	631	18
PSO125-10S	10	1250	16.74	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	641	18
PSO140-10S	10	1400	16.74	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	641	18
PSO150-10S	10	1500	16.74	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	641	18
PSO165-10S	10	1650	16.74	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	641	18
PSO10-VPD	10	1650	16.74	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	641	18
LPS125-10D	10	1250	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	580	18
LPS135-10D	10	1350	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	580	18
LPS145-10D	10	1450	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	580	18
LPSO125-10S	10	1250	16.72	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	585	18
LPSO140-10S	10	1400	16.72	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	585	18
LPSO150-10S	10	1500	16.72	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	585	18
LPSO165-10S	10	1650	16.72	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	585	18
LPSO10-VPD	10	1650	16.72	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.39	1.0	0.75	585	18
LLPS125-10D	10	1250	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	514	18
LLPS135-10D	10	1350	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	514	18
LLPS145-10D	10	1450	14.95	16.71	14.95	11.01	7.96	5.98	4.5	3.32	2.45	1.77	1.33	1.0	514	18
LLPSO125-10S	10	1250	16.7	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.9	1.0	0.75	519	18
LLPSO140-10S	10	1400	16.7	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.9	1.0	0.75	519	18
LLPSO150-10S	10	1500	16.7	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.9	1.0	0.75	519	18
LLPSO165-10S	10	1650	16.7	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.9	1.0	0.75	519	18
LLPSO10-VPD	10	1650	16.7	14.02	12.54	9.24	6.68	4.8	3.6	2.61	1.92	1.9	1.0	0.75	519	18
PS86-10V	10	860	19.02	21.27	19.02	14.02	10.13	7.28	5.2	3.66	2.7	1.95	1.4	1.0	633	18
PSO115-10V	10	1150	19.02	15.19	13.59	10.01	7.24	5.2	3.71	2.61	1.92	1.39	1.0	0.71	643	18
PSO125-10V	10	1250	19.02	15.19	13.59	10.01	7.24	5.2	3.71	2.61	1.92	1.39	1.0	0.71	643	18
PSO145-10V	10	1450	19.02	15.19	13.59	10.01	7.24	5.2	3.71	2.61	1.92	1.39	1.0	0.71	643	18
PSDO165-18	18	1650	21.27	15.64	14.89	12.41	10.4	8.66	7.32	6.09	5.05	4.21	3.54	2.94	794	29.5
					2.47	2.06	1.74	1.45	1.2	1.0	0.84	0.7				
PSDO185-18	18	1850	21.27	15.64	14.89	12.41	10.4	8.66	7.32	6.09	5.05	4.21	3.54	2.94	794	29.5
					2.47	2.06	1.74	1.45	1.2	1.0	0.84	0.7				
PSDO205-18	18	2050	21.27	15.64	14.89	12.41	10.4	8.66	7.32	6.09	5.05	4.21	3.54	2.94	794	29.5
					2.47	2.06	1.74	1.45	1.2	1.0	0.84	0.7				
AMO1750-4C	4	17500	2.93		2.37	1.24	1.0	0.81							540	14
AMO1750-4D	4	17500	1.96		1.59	1.24	1.0	0.81							540	14
APO1750-4C	4	17500	2.93		2.37	1.24	1.0	0.81							540	14
APO1750-4D	4	17500	1.96		1.59	1.24	1.0	0.81							540	14
ATO1750-4C	4	17500	2.93		2.37	1.24	1.0	0.81							540	14
ATO1750-4D	4	17500	1.96		1.59	1.24	1.0	0.81							540	14

VOLVO TRUCKS NORTH AMERICA



	SPEEDS	TORQUE	OVERALL RATIO	FORWARD RATIOS												WEIGHT (LB)	LUBE (PT)
				1	2	3	4	5	6	7	8	9	10	11	12		
DIRECT DRIVE FOR D11, D13																	
AT2512C	12	1850	14.94	14.94	11.73	9.04	7.09	5.54	4.35	3.44	2.70	2.08	1.63	1.27	1.00	597	30
OVERDRIVE FOR D11, D13																	
ATO2512C	12	1850		11.73	9.21	7.09	5.57	4.35	3.41	2.70	2.12	1.63	1.28	1.00	0.78	597	30
OVERDRIVE FOR D16																	
ATO3112C	12	2300	15.04	11.73	9.21	7.09	5.57	4.35	3.41	2.70	2.12	1.63	1.28	1.00	0.78	597	30

No More Deadheading

eTrucker Loads keeps your truck and your pockets

Full

If your truck's not loaded, you're not making money. eTruckerLoads freight matching service can put you on the road to profits by making it easy for you to find good-paying loads. As an eTruckerLoads user, you'll enjoy:

- Flexible real-time searching
- Ability to post loads and trucks by e-mail, FTP, fax or phone
- Friendly, full-time customer support staff

You'll also find:

- Credit reports
- Weather information
- Road conditions
- Fuel optimization
- Truck mileage and routing

Monthly rates as low as **\$25.00!**
Log on for a **FREE** demo today!

eTrucker
LOADS
www.eTruckerloadsonline.com

POWERED BY
THE INTERNET TRUCKSTOP®
The **FIRST** and **LARGEST** Freight Matching Service on the Internet.